

Sundance® Spas 680 McKinley™

Specifications

Dimensions:	89" x 89" x 36" (226 cm x 226 cm x 91.44 cm)
Seating Capacity:	6-7 Adults
Dry Weight:	778 lbs (353 kg)
Filled Weight (Spa Volume):	5,115 lbs (2,320 kg)
Filled Weight (Average Fill):	4,197 lbs (1,904 kg)
Water Capacity (Spa Volume):	520 US Gal (1,968 Liters)
Water Capacity (Average Fill):	410 US Gal (1,552 Liters)
Controls:	Solid-State Electronic Controls with LCD Readout, Programmable Water Temperature, Filtration, and Heat Cycles
Water Delivery:	2 High Flow Pumps
Pump 1:	North America (60 Hz): 2-Speed/2.5 HP Continuous, 11.0A Max., 56 Frame Export (50 Hz): 2-Speed/2.0 HP continuous, 8.0A max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 10.0A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP continuous, 8.0A max.
Optional Pump 3:	N/A
Total Hydrojets:	44
Seat A Jets:	2 DX, 2 DVX, 2 DVR
Seat B Jets:	2 DL
Seat C Jets:	4 DX, 6 DL, 1 DST (Sidewall)
Seat D Jets:	2 DL
Seat E Jets:	2 DX, 4 DVR
Seat F Jets:	2 DX, 6 DXL
Seat G Jet:	1 DL
Footwell Jets (H):	8 DL
Air Controls/Massage Selectors:	4/1
Filter:	50 ft² Filter Cartridge System
Water Treatment:	Factory installed CLEARRAY® Water Purification System and CLEARRAY® PRO ₃ TECT™
Lighting:	CL LED Lighting System (Interior Surround)
Synthetic Cabinet:	Available in Coastal, Mahogany, Autumn Walnut
Shell Colors:	North America: Platinum, Celestite (Gypsum), Sahara, Monaco, Midnight, Porcelain Export (50 Hz): All North America Colors
Headrests:	Four, 1-Piece Gray
Heater:	North America (60 Hz): 5.5 kW, 240V High Flow Standard Export (50 Hz): 2.7 kW High Flow Standard
Electrical Requirements:	240 VAC, 60 Hz@40A, 50A or 60A Export (50 Hz): 230-240 VAC@1x20A, 1x16A/1x20A or 3x16A (see manual for more configurations); or Suitably Rated Circuit Breaker to Comply with Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required for This Configuration.
Limited Warranty*	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Equipment and Controls, 3 Years Plumbing Component Leaks, 1 Year Cabinet, 1 Year Jets, 1 Year Stereo Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets, 2 Years Stereo
Waterfall Feature:	Variable Valve Control
Audio System (Optional):	N/A
Special Features (Optional):	Factory Installed SmartTub™ module
Alternative Insulation (Option):	Yes



Sundance Spas 680 McKinley

Operation/Seat Depths



(A) Air Control - Activates Seat A Jets (2 DX, 2 DVR, 2 DVX) + Seat B Jets (2 DL) + Side Wall Jet (1 DST) + Seat G Jet (1 DL) + Footwell Jets (2 DL)

(B) Massage Selector [Pump 1]- Adjusts Seat A Jets + Seat B Jets + Seat G + Side Wall Jet + 2 Footwell Jets and Seat C Jets + 2 Footwell Jets

(C) Air Control - Activates Seat C Jets (4 DX, 6 DL) + Footwell Jets (2 DL)

(D) Air Control - Activates Seat D Jets (2 DL) + Seat E Jets (2 DX, 4 DVR) + Footwell Jets (2 DL)

(E) Air Control - Activates Seat F Jets (2 DX, 6 DXL) + Footwell Jets (2 DL)

(F) Waterfall Selector [Pump 1] - Controls Waterfall Output

- Jets Pump 1: Powers Seat A Jets + Seat B Jets + Side Wall Jet + Seat C Jets + Seat G Jet + 4 Footwell Jets when running

- Jets Pump 2: Powers Seat D Jets + Seat E Jets + Seat F Jets + 4 Footwell Jets when running

44 Total Jets (Stainless Steel Escutcheons Standard)



Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 25.50" (64.77 cm)

B = 25.00" (63.50 cm)

C = 26.50" (67.31 cm)

D = 22.25" (56.52 cm)

E = 25.75" (65.41 cm)

F = 20.50" (52.07 cm)

G = 26.63" (67.63 cm)

H = 16.63" (42.23 cm)

I = 31.50" (80.01 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 680 McKinley


Portable Dimensions

TOP VIEW

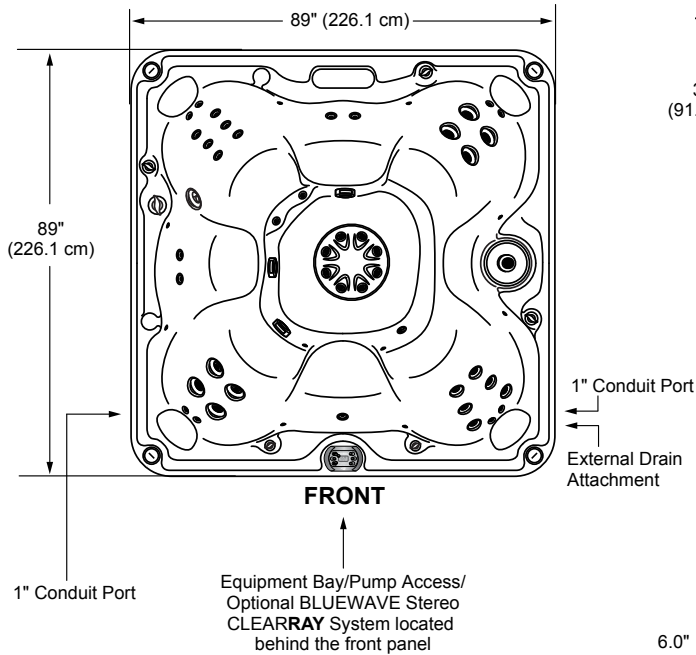


FRONT VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)

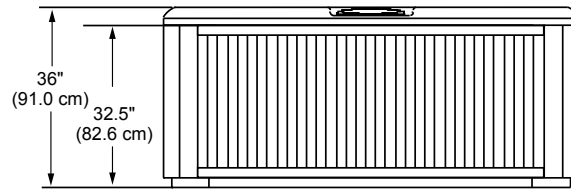


RIGHT SIDE VIEW

Tolerance: $\pm 0.5"$ (1.27 cm)

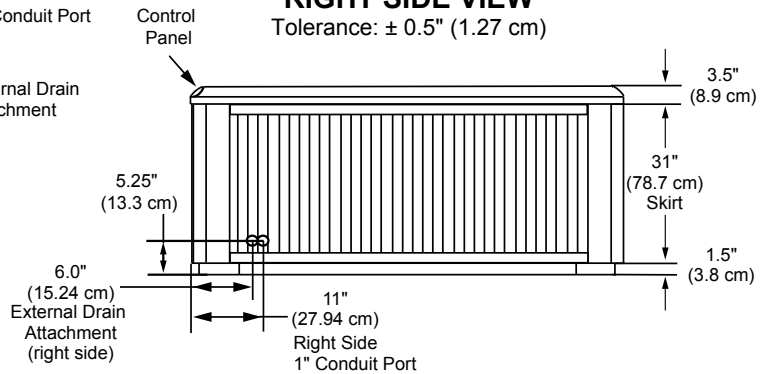

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

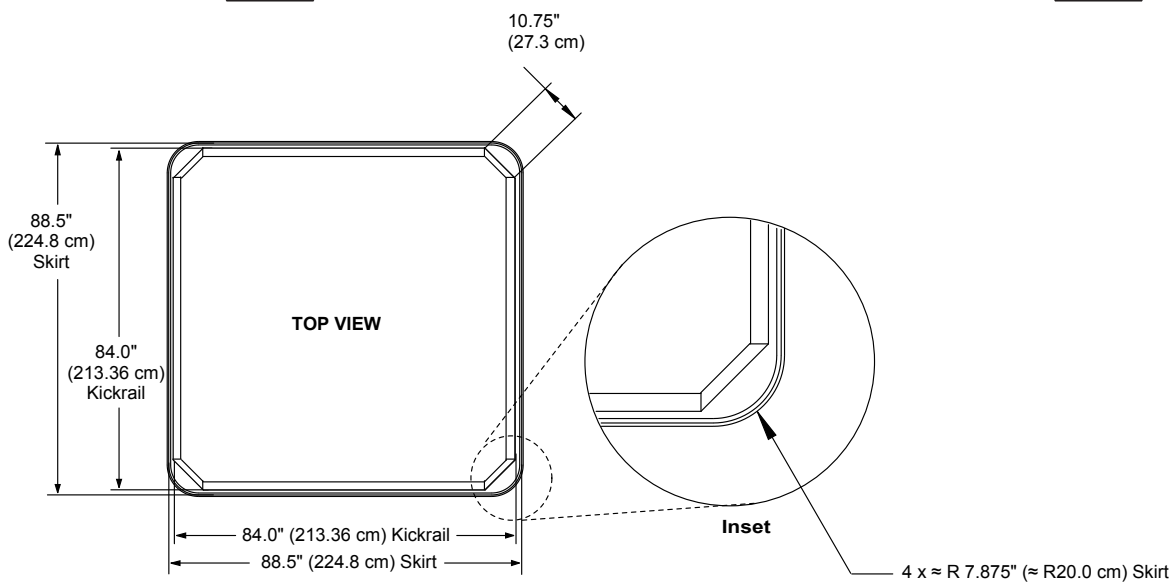

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice